

DeKalb County Historic Preservation Commission

Monday, April 15th, 2024- 6:00 P.M.

Staff Report

Regular Agenda

O. 1384 Emory Road, Sean Lehnherr. Paint brick on a historic house. **1246970**

Built in 1924 (18 054 11 015)

This property is located in Druid Hills Character Area #2 and in the Druid Hills National Register Historic District.

Summary

The applicant proposes painting the previously unpainted exterior brick. The paint will be an elastomeric masonry specific coating and has already been applied to a portion of the home before a COA application was submitted for review. Applicant states that the purpose of painting the brick is to address previous mismatched repairs to the masonry including repointing and repainting.

Recommendation

Deny. Paint and other surface treatments should not be applied to historic masonry in accordance with guidelines 6.1.1, 6.1.2, and 6.8. Painting the masonry does not address the underlying issue of the failing mortar, which should be maintained and repaired as needed in accordance with guidelines 6.1.1 and 6.7. Staff recommends removal of the paint that has been applied prior to review with a solvent based chemical paint remover and gentle abrasion. Once the paint has been removed, staff recommends repairing the failed mortar with a lime-based mortar to match the color, texture, depth, and width of the current joints.

Relevant Guidelines

- 5.0 *Design Review Objective* (p45) - When making a material change to a structure that is in view from a public right-of-way, a higher standard is required to ensure that design changes are compatible with the architectural style of the structure and retain character-defining features. When a proposed material change to a structure is not in view from the public-right-way, the Preservation Commission may review the project with a less strict standard so as to allow the owner more flexibility. Such changes, however, shall not have a substantial adverse effect on the overall architectural character of the structure.
- 6.1.1 *Exterior Materials* (p50) Guideline - Original masonry should be retained to the greatest extent possible without the application of any surface treatment, including paint. Repointing of mortar joints should only be undertaken when necessary, and the new mortar should duplicate the original material in composition, color, texture, method of application, and joint profile. Repaired joints should not exceed the width of original joints. The use of electric saws and hammers in the removal of old mortar is strongly discouraged as these methods can seriously damage adjacent bricks.
- 6.1.2 *Architectural Details* (p52) Guideline - Stylistic details should be maintained and treated with sensitivity. The removal of such details or application of details inappropriate to the period or style of a house is strongly discouraged. Damaged elements should be repaired rather than replaced if at all possible. Historic details that have been lost or are beyond repair may be replaced with new materials, provided that their earlier presence can be substantiated by historical documentation and that the new materials match the original in composition, design, color, and texture.
- 6.7 *Maintenance* (p60) Recommendation - The most effective and economical way to preserve a historic building and its site features is to provide regular maintenance, thus minimizing the need to replace historic materials.

6.8 *Exterior Colors* (p60) Guideline - The initial painting or other surface treatment of masonry and stucco will be reviewed by the preservation commission, and shall not be precluded if brought in a retroactive application. The specific color of the paint, however, will not be reviewed. Appropriate paint colors are usually related to the style and type of the property in question. (Approved 6-18-2018)

Chief Executive Officer
Michael Thurmond

DEPARTMENT OF PLANNING & SUSTAINABILITY

Interim Director
Cedric Hudson

Application for Certificate of Appropriateness

Date submitted: _____ Date Received: _____

Address of Subject Property: _____

Applicant: _____ E-Mail: _____

Applicant Mailing Address: _____

Applicant Phone: _____

Applicant's relationship to the owner: Owner Architect Contractor/Builder Other

Owner(s): _____ Email: _____

Owner(s): _____ Email: _____

Owner(s) Mailing Address: _____

Owner(s) Telephone Number: _____



Approximate date of construction of the primary structure on the property and any other structures affected by this project: _____

Nature of work (check all that apply):

- | | | | | | |
|-------------------|--------------------------|------------------------|--------------------------|-----------------------------|--------------------------|
| New construction | <input type="checkbox"/> | New Accessory Building | <input type="checkbox"/> | Other Building Changes | <input type="checkbox"/> |
| Demolition | <input type="checkbox"/> | Landscaping | <input type="checkbox"/> | Other Environmental Changes | <input type="checkbox"/> |
| Addition | <input type="checkbox"/> | Fence/Wall | <input type="checkbox"/> | Other | <input type="checkbox"/> |
| Moving a Building | <input type="checkbox"/> | Sign Installation | <input type="checkbox"/> | | |

Description of Work:

This form must be completed in its entirety and be accompanied by supporting documents, such as plans, list of materials, color samples, photographs, etc. All documents should be in PDF format, except for photographs, which may be in JPEG format. Email the application and supporting material to plansustain@dekalbcountyga.gov and pjvennings@dekalbcountyga.gov. An incomplete application will not be accepted.

Signature of Applicant:  

DEPARTMENT OF PLANNING & SUSTAINABILITY

Authorization of a Second Party to Apply for a Certificate of Appropriateness

This form is required if the individual making the request is **not** the owner of the property.

I/ We: _____

being owner(s) of the property at: _____

hereby delegate authority to: _____

to file an application for a certificate of appropriateness in my/our behalf.

Signature of Owner(s): _____

Date: _____

Please review the following information

Approval of this Certificate of Appropriateness does not release the recipient from compliance with all other pertinent county, state, and federal regulations.

Before making any changes to your approved plans, contact the preservation planner (404/371- 2155). Some changes may fall within the scope of the existing approval, but others will require review by the preservation commission. If work is performed which is not in accordance with your certificate, a Stop Work Order may be issued.

If your project requires that the county issue a Certificate of Occupancy at the end of construction, an inspection may be made to verify that the work has been completed in accord with the Certificate of Appropriateness. If the work as completed is not the same as that approved in the Certificate of Appropriateness you will not receive a Certificate of Occupancy. You may also be subject to other penalties including fines and/or required demolition of the non-conforming work.

If you do not commence construction within twelve months of the date of approval, your Certificate of Appropriateness will become void and you will need to apply for a new certificate if you still intend to do the work.



Government Services Center
 178 Sams Street
 Decatur, GA 30030
www.dekalbcountyga.gov/planning
 404-371-2155 (o); 404-371-4556 (f)

DEPARTMENT OF PLANNING & SUSTAINABILITY

**DEKALB COUNTY HISTORIC PRESERVATION COMMISSION
 2024 Calendar**

This calendar is subject to change. Please visit the [Department of Planning and Sustainability](http://www.dekalbcountyga.gov/planning) website for the current calendar, agenda, and applications.

<u>Applications Accepted</u>	<u>Filing Deadline</u>	<u>Sign Must Be Posted</u>	<u>HPC Meeting Date</u>	<u>Last Date to File Appeal (approximate)</u>
December 11	December 24	January 06	January 16	February 1
January 8	January 21	February 10	February 20	March 7
February 12	February 24	March 8	March 18	April 3
March 11	March 24	April 5	April 15	May 1
April 8	April 21	May 10	May 20	June 5
May 13	May 26	June 7	June 17	July 3
June 12	June 23	July 5	July 15	July 31
July 8	July 21	August 9	August 19	September 4
August 14	August 25	September 6	September 16	October 2
September 9	September 22	October 11	October 21	November 6
October 14	October 27	November 8	November 18	December 4
November 11	November 22	December 6	December 16	January 2
December 16	December 30	January 10	January 21	February 5

Tuesday meeting due to holiday

DEPARTMENT OF PLANNING & SUSTAINABILITY

How to Obtain a Certificate of Appropriateness

1. Contact the DeKalb County Department of Planning and Sustainability for an application form. You may make your request by email plansustain@dekalbcountyga.gov AND rlbragg@dekalbcountyga.gov, telephone (404) 371-2247, or fax (404) 371-2813, or visit the website at <https://www.dekalbcountyga.gov/planning-and-sustainability/forms>.
2. Complete and submit the application. Please provide as much supporting material as possible, (plans, material, color samples, photos, etc.). All documents must be in PDF format except for photographs, which may be in JPEG format. Applications are accepted for a 10-day period each month. See page 3 (HPC Calendar). Email the application and supporting documents to plansustain@dekalbcountyga.gov AND rlbragg@dekalbcountyga.gov. If all documents are not provided the application will not be complete and will not be accepted.
3. The Preservation Planner will post a sign on the property at least ten days before the preservation commission meeting or coordinate sign posting with the applicant.
4. The Preservation Planner will visit the property as part of their review. The commission members may view the property from the right-of-way.
5. Applications will be reviewed by the DeKalb County Historic Preservation Commission at its monthly meeting. The Historic Preservation Commission meets on the third Monday at 6 p.m., via Zoom. In unusual circumstances meeting dates and location may be changed.
6. The Historic Preservation Commission may approve, approve with modifications or deny an application. The applicant or any affected person as defined by county code may appeal the decision to the DeKalb County Board of Commissioners. Please contact the Department of Planning and Sustainability if you wish to file an appeal. The Historic Preservation Commission is required to make a decision on an application within 45 days of the date of filing, although this time can be extended if the applicant agrees to a deferral.
7. Although not required, applicants are encouraged to attend the Historic Preservation Commission meetings. Applicants may make a presentation, but presentations are not required. The commissioners may have questions for the applicant.
8. Approval of a Certificate of Appropriateness does not release the recipient from compliance with all other county, state and federal regulations.

DEPARTMENT OF PLANNING & SUSTAINABILITY

Design Checklist for a Certificate of Appropriateness

This checklist was created to help applicants prepare a complete application. Omissions and inaccurate information can lead to deferrals and/or denials of applications. Please review the checklist with the project's architect, designer, or builder. All items will not be applicable to all projects. New construction will involve all categories. One copy of drawings at scale (plus nine reduced sets) should be submitted.

Please address questions regarding applicability to your project to the DeKalb County Preservation Planner at 404-687-3945, e-mail pvjennings@dekalbcountyga.gov and rlbragg@dekalbcountyga.gov.

Applicants are also referred to the DeKalb County website, <http://www.dekalbcountyga.gov/planning-and-sustainability/planning-sustainability>.

I have reviewed the "Design Manual for the Druid Hills Local Historic District".

I have reviewed the DeKalb County Tree Ordinance.

I have reviewed applicable zoning codes regarding lot coverage, garage sizes, stream buffers.

1. General

- a. Label all drawings with the address of the site, owners' name, and contact phone number.
- b. Number all drawings.
- c. Include a graphic scale on reductions.
- d. Date all revisions.
- e. Indicate all unverified numbers with +/- signs
- f. Include photos of the existing condition of the property.

2. Site Plan (existing and proposed) to include:

- a. Topographical plan with significant trees sized and located;
- b. Setback compared to adjacent houses (ask surveyor to show corners of adjacent houses);
- c. Distance between houses;
- d. Façade width to finished face of material;
- e. Grading and elevations across site;
- f. Dirt removal or regrading if more than 18";
- g. Tree protection plan;
- h. Tree removal and replacement plan

3. Driveways and Walkways

- a. Location and relationship to house;
- b. Width;
- c. Material;
- d. Curb cut and apron width

4. Fences & Retaining Walls

- a. Placement on lot;
- b. Height of fence or wall. If retaining wall, height on both sides;
- c. Material;
- d. Railing if necessary

5. Elevations and Floor Plans: <<Indicate all unverified numbers with +/- signs>>

- a. Plans for all floors (drawn to scale, ¼"=1' preferred);
- b. House orientation on site plan;
- c. Scalable elevations for front, rear, left, right;
- d. Height, grade to ridge;
- e. Streetscape comparison showing heights of two flanking houses on each side;
- f. Height from grade to first floor level at all four corners;
- g. Height from grade or finished floor line to eaves at all four corners;
- h. Ceiling heights of each floor, indicating if rough or finished;
- i. Height of space between the ceiling and finished floor above;
- j. Two people of 5'-6" and 6' height shown;
- k. Landscaping plan

6. Additions

- a. Placement shown on elevations and floor plan;
- b. Visibility from rights-of-way and paths;
- c. Photos of all facades;
- d. Design proportioned to main house;
- e. Landscaping plan;
- f. Materials and their combinations

7. Roof Plan

- a. Shape and pitch of roof;
- b. Roofing material;
- c. Overhang;
- d. Louvers and vents;
- e. Chimney height and material

8. Dormers

- a. Construction details provided;
- b. Shape and size of dormer (show dimensions on drawings);
- c. Overhang;
- d. Size of window(s), with nominal size of sash (show dimensions on drawings)

9. Skylights

- a. Profile;
- b. Visibility from right-of-way;
- c. Material (plastic lens or glass);
- d. Shown in plan and elevation to scale

10. Façade

- a. Consistency in style;
- b. Materials and their combinations
 - brick size and color
 - stone type and color
 - fiber-cement (e.g., Hardie-plank) or wood siding
 - shake or shingle
 - other
- c. Height of foundation at corners;
- d. Ceiling heights comparable to area of influence: basement, first floor, second floor;
- e. Detailing: soldier course, brackets, fascia board; water table;
- f. Height from grade to roof ridge;
- g. Dimensions, proportions and placement of windows, doors

11. Entrance

- a. Height and width of door;
- b. Design of door (e.g., 6-panel, craftsman);
- c. Material of door;
- d. Overhang;
- e. Portico height;
- f. Size and height of columns or posts;
- g. Railing

12. Windows

- a. Consistent with original as well as the area of influence;
- b. Size and proportion similar to original;
- c. Pane orientation and size similar to original;
- d. Type (e.g., double hung, casement);
- e. Fenestration on walls visible from right-of-way;
- f. Simulated divided light (SDL) or true divided light (TDL): location of muntins between the glass, behind the glass or permanently affixed on exterior;
- g. Material of window and any cladding;
- h. Width of muntins compared to original (show dimensions on drawings);
- i. Shutters or canopies
- j. Dimensions of windows and doors.

13. Materials

- a. Show all materials and label them on drawings;
- b. Provide samples of brick or stone;
- c. Provide samples if new or unusual materials

14. Garages / Accessory Buildings

- a. Visibility from street;
- b. Placement on site;
- c. Scale, style appropriate for house;
- d. Show dimensions on drawings;
- e. Materials;
- f. Square footage appropriate for lot size;
- g. Garage door size and design
- h. Show height from grade to eaves and to top of roof

15. Demolitions

- a. Provide documentation from engineer concerning feasibility of rehabilitation;
- b. Provide photographs of structure to be demolished;
- c. Provide plan for proposed redevelopment

Application Process Checklist

This checklist is to ensure that applicants understand the Certificate of Appropriateness (COA) application process from beginning to end. Please verify that you have read over the process shown below and understand the procedures and timeline that will be followed for all submitted COA applications.

- Applications may only be submitted during the period specified on the calendar for each month. Once the filing deadline has passed and that period has expired, **no new applications will be accepted** to be heard at that month's commission meeting. If an application has not been submitted before the filing deadline, it cannot be submitted again until the next period for applications has opened.
- Additional materials submitted after the staff's report have been finalized and posted to the public will not be taken into consideration for the staff report. Staff reports will not be edited once finalized and published – any new materials may be submitted for the record for the commission but will not affect the staff's report for the application.
- Any additional materials submitted after the staff's report has been finalized and posted to the public may be added to the record for the historic preservation commission to review as supplemental materials for the submitted application. Supplemental materials includes:
 - Representative photos
 - Letters of support/opposition
 - Architectural drawings
 - Updated site plans

Supplemental materials **do not** include documents for new work to be added to the already submitted application. Any materials that propose new work that was not included in the original application, will not be added to the record. Any proposed new work that was not included in the original application will need to be included in a new application to be submitted for next month's commission meeting.

I have reviewed the information above and understand the Certificate of Appropriateness process.

I have reviewed the HPC calendar.

Loxon® XP

Waterproofing Masonry Coating-Flat

LX11-50 Series


**SHERWIN
WILLIAMS®**

CHARACTERISTICS

Loxon XP is an exterior, high build coating that provides excellent flexibility, durability and weather resistance. This product will protect against wind-driven rain when used on concrete, CMU, stucco and shotcrete-gunite. It is highly alkali and efflorescence resistant. This may be applied to a surface with a pH of 6 to 13.

Apply directly to fresh concrete (at least 7 days old). Shotcrete/gunite surfaces may be painted after 3 days.

Can be applied over high pH (up to 13) substrates, no primer required.

Can be applied down to 35°F.

Color: Most Colors

1 coat system, brush, roller, or spray applied, coverage per coat:

Wet mils: 14.5-18.5

Dry mils: 6.5-8.4

Coverage sq.ft. per gallon 85-110

Can be applied up to 40 mils wet.

Coverage will vary with the substrate and the texture. Coverage on porous & rough stucco 80 square feet per gallon.

Drying Schedule @ 50% RH: temperature and humidity dependent.

@35-45°F @ 45°F+

Touch: 6 hrs 4 hrs

Recoat: 24-48 hrs 24 hrs

Drying time is temperature, humidity, and film thickness dependent.

Finish: 0-10 units @ 85°

Tinting with CCE only:

Base **oz.per gallon** **Strength**

Extra White 0-6 SherColor

Deep Base 4-12 SherColor

Ultra Deep 10-12 SherColor

Light Yellow 0-12 SherColor

Extra White LX11W0051

(may vary by color)

V.O.C. (less exempt solvents):

less than 50 grams per litre; 0.42 lbs. per gallon

As per 40 CFR 59.406

Volume Solids: 45 ± 2%

Weight Solids: 61 ± 2%

Weight per Gallon: 11.46 lb

Flash Point: N.A.

Vehicle Type: Proprietary Acrylic

Shelf Life: 36 months, unopened

Mildew Resistant:

This coating contains agents which inhibit the growth of mildew on the surface of this coating film. Passes ASTM D3273/D3274

COMPLIANCE

As of 2/4/2022, Complies with:

OTC	Yes
OTC Phase II	Yes
S.C.A.Q.M.D	Yes
CARB	Yes
CARB SCM 2007	Yes
CARB SCM 2020	Yes
Canada	Yes
LEED® v4 & v4.1 Emissions	N.A.
LEED® v4 & v4.1 V.O.C.	Yes
EPD-NSF® Certified	No
MIR-Manufacturer Inventory	No
MPI®	Yes
SWRI®- Wall Coating	Yes

APPLICATION

Temperature:

minimum 35°F

The following is a guide. Changes in pressures and tip sizes may be needed for proper spray characteristics. Always purge spray equipment before use with listed reducer. Any reduction must be compatible with the existing environmental and application conditions.

Reducer: Do not reduce

Airless Spray:

Pressure 2300 p.s.i.

Tip .021 inch

Brush Use a nylon/polyester brush

Roller Cover Use a ½ to 1½ inch nap synthetic roller cover.

The substrate and its condition will determine the application procedure. Considerations to minimize pinholes:

- 2 coat application with overnight drying between coats
- Spray application with backrolling
- Power rolling

Spray and backroll on porous & rough stucco to achieve required film build and a pin-hole free surface.

When the air temperature is at 35°F, substrates may be colder. Prior to painting, check to be sure the air, surface, and material temperatures are above 35°F and at least 5°F above the dew point. Avoid using if rain or snow is expected within 2-3 hours.

Do not apply at air or surface temperatures below 35°F or when air or surface temperatures may drop below 35°F within 48 hours.

Do not reduce.

APPLICATION TIPS

For proper waterproofing performance and to resist alkalies, 2 coats of the coating **MUST** be applied between 14.5 -18.5 mils wet per coat.

A total dry film thickness of 13 - 16.8 mils of topcoat and a surface with 10 or less pinholes per square foot is required for a waterproofing system.

For extremely porous block a coat of Loxon Block Surfacers may be required to achieve a pinhole free surface.

For rehabilitating existing concrete water tanks, additional products may be used.

RECOMMENDED SYSTEMS

Concrete, Stucco, Concrete Block, CMU, Split-face Block, and other Cementitious surfaces

1 coat Loxon Acrylic Block Surfacers (if needed) or Loxon Conditioner (if needed)

1-2 coats Loxon XP

Previously Coated in good condition:

After power washing, apply 1 coat of Loxon XP over the surface.

Incidental Wood:

1 coat Exterior Latex Wood Primer1-2 coats Loxon XP

Incidental Metal:

(steel, galvanized, or aluminum):

1 coat Pro Industrial Pro-Cryl Primer

1-2 coats Loxon XP

Waterproofing System:

- Two coats of topcoat
- 6.5 to 8.4 mils d.f.t. per coat
- 13 to 16.8 mils total dry film thickness
- 10 or less pinholes per square foot

Loxon® XP

Waterproofing Masonry Coating-Flat

SURFACE PREPARATION

WARNING! Removal of old paint by sanding, scraping or other means may generate dust or fumes that contain lead. Exposure to lead dust or fumes may cause brain damage or other adverse health effects, especially in children or pregnant women. Controlling exposure to lead or other hazardous substances requires the use of proper protective equipment, such as a properly fitted respirator (NIOSH approved) and proper containment and cleanup. For more information, call the National Lead Information Center at **1-800-424-LEAD** (in US) or contact your local health authority.

Remove all surface contamination by washing with an appropriate cleaner, rinse thoroughly and allow to dry. Scrape and sand peeled or checked paint to a sound surface. Sand glossy surfaces dull. Seal stains from water, smoke, ink, pencil, grease, etc. with the appropriate primer-sealer. Recognize that any surface preparation short of total removal of the old coating may compromise the service length of the system.

Concrete, CMU, Stucco:

On tilt-up and poured-in-place concrete, commercial detergents and sandblasting may be necessary to remove sealers, release compounds, and to provide an anchor pattern. Concrete and mortar must be cured at least 7 days at 75°F. Fill bugholes, air pockets, cracks, and other voids with an elastomeric patch or sealant. Rough surfaces can be filled to provide a smooth surface.

Incidental Metal:

Wash to remove any oil, grease, or other surface contamination. All corrosion must be removed with sandpaper, wire brush, or other abrading method. Primer required.

Incidental Wood:

Sand any exposed wood to a fresh surface. Patch all holes and imperfections with a wood filler or putty and sand smooth. All patched areas must be primed. Primer required.

Sealing and Patching—After cleaning the surface thoroughly, prime the concrete surface with Loxon XP, apply an elastomeric patch or sealant if needed, allow to dry, then topcoat.

To improve the performance, consider:

- Use caution when preparing the substrate to create a uniform surface.
- Cracks, crevices, and through-wall openings must be patched with an elastomeric patch or sealant.
- Fill voids and openings around window and doors with an elastomeric patch or sealant.
- Stripe coat all inside and outside corners and edges with 1 coat of Loxon XP coating.

SURFACE PREPARATION

Mildew:

Prior to attempting to remove mildew, it is always recommended to test any cleaner on a small, inconspicuous area prior to use. Bleach and bleaching type cleaners may damage or discolor existing paint films. Bleach alternative cleaning solutions may be advised.

Mildew may be removed before painting by washing with a solution of 1 part liquid bleach and 3 parts water. Apply the solution and scrub the mildewed area. Allow the solution to remain on the surface for 10 minutes. Rinse thoroughly with water and allow the surface to dry before painting. Wear protective eyewear, waterproof gloves, and protective clothing. Quickly wash off any of the mixture that comes in contact with your skin. Do not add detergents or ammonia to the bleach-water solution.

PHYSICAL PROPERTIES

Do not paint on wet surfaces.

LX11W0051

Wind-Driven Rain Test : Pass
Method: ASTM D6904 7 day cure
2 coats Loxon XP @ 8.1 mils d.f.t. per coat

Water Vapor Permeance:
(perms) 18.03 grains/h-ft²-in Hg.
Method: ASTM D1653 7 day cure @ 73°F & 50% RH: Method B, Condition A-Wet cup
2 coats Loxon XP @ 8.1 mils d.f.t. per coat

Elongation : 312%
Method: ASTM D412, 7 day cure @ 72°F & 50% RH 20 inch per minute
2 coats Loxon XP @ 8.1 mils d.f.t. per coat

Tensile Strength : 295 p.s.i.
Method: ASTM D412, 7 day cure @ 72°F & 50% RH 20 inch per minute
2 coats Loxon XP @ 8.1 mils d.f.t. per coat

Flexibility:
Method: ASTM D522, 9 mils d.f.t., 1 day cure
Result: Pass 1/8 inch

Alkali Resistance:
Method: ASTM D1308, 7 day cure,
11.25 mils d.f.t.
Result: Pass

Chloride Ion Permeability:
Result: 243 coulombs
Result: "Very Low" Permeability Class

CO₂ Diffusion (anti-carbonation):
Method: ASTM F2476
Result: 344 meters
equivalent air thickness >50 meters to pass
8.0 g/m²/24 hrs

Crack Bridging: Class A5 Pass
Method: EN 1062-7 Method A
Result: up to 2.5 mm @ -10°C

Efflorescence:
Method: ASTM D7072-19
1 coat, 1 day cure, 7.2 d.f.t.
Result: Pass

Adhesion:
Method: ASTM D4541
2 coats, 7 day cure, 7.2 d.f.t. per coat
Result: 375 average p.s.i.

CAUTIONS

For exterior use only.

Protect from freezing.

Non-photochemically reactive.

Not for use on horizontal surfaces (floors, roofs, decks, etc.) where water will collect.

Not for use below grade. Will not withstand hydrostatic pressure.

Before using, carefully read **CAUTIONS** on label.

ZINC. Use only with adequate ventilation. To avoid overexposure, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, or dizziness, increase fresh air, or wear respiratory protection (NIOSH approved) or leave the area. Avoid contact with eyes and skin. Wash hands after using. Keep container closed when not in use. Do not transfer contents to other containers for storage. **FIRST AID:** In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, hospital emergency room, or physician immediately. **WARNING:** This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. **DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN.**

HOTW 2/4/2022 LX11W0051 27 00
FRC, SP

CLEANUP INFORMATION

Clean spills, splatters, hands and tools immediately after use with soap and warm water. After cleaning, flush spray equipment with a compliant cleanup solvent to prevent rusting of the equipment. Follow manufacturer's safety recommendations when using solvents.



1346 Emory Rd NE

Clifton Community, Atlanta



1331 Emory Rd NE

Clifton Community, Atlanta



1337 Emory Rd NE

Clifton Community, Atlanta



1337 Emory Rd NE

Clifton Community, Atlanta



1374 Emory Rd NE

Clifton Community, Atlanta



1374 Harvard Rd NE

Clifton Community, Atlanta



1364 Springdale Rd NE

Clifton Community, Atlanta




1374 Harvard Rd NE

Clifton Community, Atlanta



1394–1418 Emory Rd NE

Clifton Community, Atlanta

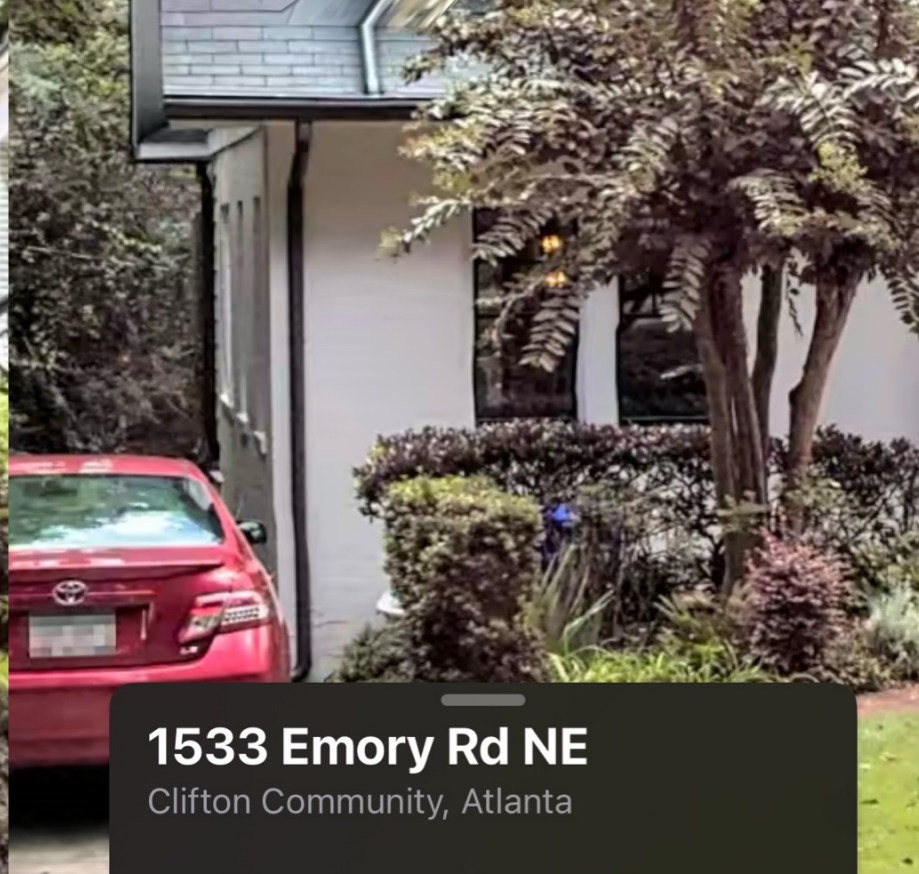

1533 Emory Rd NE

Clifton Community, Atlanta



1537 Emory Rd NE

Clifton Community, Atlanta



1502 Emory Rd NE

Clifton Community, Atlanta











